

4 Door Styles - 17 Colors

# **2025 SPECIFICATION GUIDE**

## TABLE OF CONTENTS


WeatherStrong® Outdoor Cabinetry	3
The WeatherStrong® Difference	4-5
Door Styles and Finishes	6-7
Base Cabinets	8-24
Important Grill and Side Burner Information	8
Grill Base Cabinets	9-10
Side Burner Cabinets	11
Kamado Grill Base Cabinet	12
Base Cabinets	13-24
Wall Cabinets	25-30
Utility Cabinets	31-32
Matching End Panels, Island Panel	33-34
Parts & Accessories	35-36
Weatherproof Stools	37
Drawer Front and Drawer Box Dimensions	38
Decorative Hardware	39
Leg Leveling and Toe Kick Application	40-43
Installation Guides	44-49
Care and Use Guide	50-52
Warranty	53







## **WEATHERSTRONG® OUTDOOR CABINETRY**

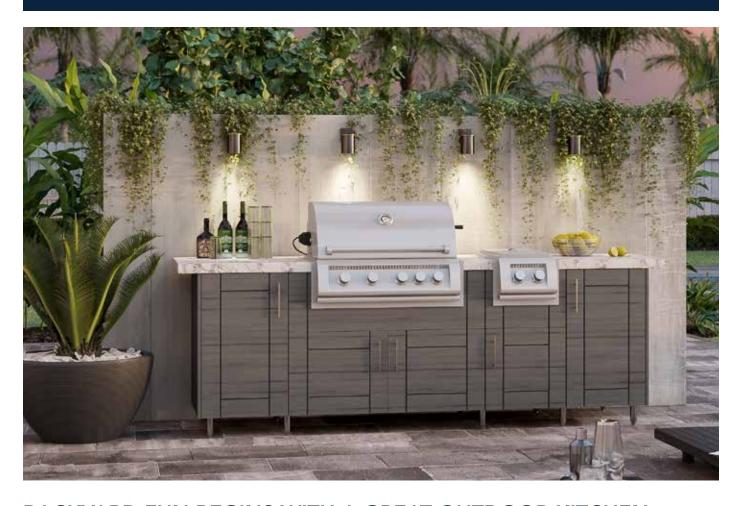

### BACKYARD FUN BEGINS WITH A GREAT OUTDOOR KITCHEN

With the desire to spend more quality time outdoors, **WeatherStrong®** Outdoor Cabinetry is designed with your lifestyle in mind. Our cabinets are manufactured in the U.S.A. using a ¾" **All-Weatherboard®** composite material, with solid High-Density Polyethylene (HDPE) doors and cover panels, designed to stand up to the harsh elements Mother Nature can send your way. Pounding rain, hot summers, and cold snowy winters are no problem. Your **WeatherStrong®** cabinets are tough enough to take it!

All cabinets are factory built to order in a variety of sizes and they ship in 7 to 10 Days.





## THE WEATHERSTRONG® DIFFERENCE

**WeatherStrong®** Outdoor Cabinetry combines premium materials, each designed with durability, strength, and superior weather resistance to create the ultimate in weatherproof cabinetry.







- **1. DOOR:** Marine grade High-Density Polyethylene (HDPE) is incredibly strong, durable, and long-lasting in the most extreme weather conditions.
- **2. CABINET:** Each cabinet is built using light gray ¾" thick **All-Weatherboard®** composite material for weatherproof durability.
- **3. VENTS:** All base cabinet end panels feature vent slots to promote air flow through the cabinetry and to prevent any possible build-up of natural gas or propane due to a leak. Matching base end panels are available with inset mesh vent grills.
- **4. LEGS:** Base cabinets are shipped fully assembled, ready to be installed. The Sure Level adjustable polymer legs are included with each base cabinet and are field installed. Each leg is rated for 330 lb static load. Snap-on matching toe kick is optional for on-site modification and installation. Optional 2000 lb static load marine grade stainless steel adjustable legs are available.
- **5. HINGES:** Stainless steel, 6-way adjustable hinges ensure perfect door alignment and provide quiet, soft-closing operation.
- **6. HANDLES:** Choose from a selection of marine grade stainless steel handles.
- **7. ADJUSTABLE SHELVES:** Each shelf is made from ¾" thick **All-Weatherboard®** composite material.
- **8. DRAWER BOXES:** Four sides and bottom panel is made from ¾" thick **All-Weatherboard®** composite material, with full-extension, soft-close, stainless steel sidemounted ball bearing runners.

#### STURDY CONFIRMAT SCREW ASSEMBLY

To help ensure the assembly of strong cabinets, **WeatherStrong®** counterbores the cabinetry panels and uses stainless steel confirmat screws.





## THE WEATHERSTRONG® DIFFERENCE

#### **UNMATCHED DURABILITY**

What is All-Weatherboard® Composite Material?

WeatherStrong® uses All-Weatherboard® composite material, renowned for its resilience against moisture, rot, and termites. This composite is crafted from phenolic resins, zinc borate, wax, and wood fibers through a patented process. The result is a product that stands strong against the elements, providing long-lasting durability for all your outdoor kitchen and storage needs. All-Weatherboard® is finished with a decorative laminate and sealed with waterproof PVC edging, ensuring it stays beautiful and functional year after year.

#### **EXPOSED SIDES & BACK PROTECTION**

Outdoor environments can be harsh, but **WeatherStrong®** cabinets are up to the task. Exposed backs and sides will need to be protected by adding High-Density Polyethylene (HDPE) end panels and are field installed. This not only adds an extra layer of protection but also helps maintain the structural integrity and longevity of your cabinets, essential for withstanding direct sunlight and weather elements.

#### **EASY MAINTENANCE**

Simple Clean-Up

Keeping your **WeatherStrong®** cabinets looking their best is hassle-free. A quick wash with water and a soft cloth or sponge is all it takes. For tougher spots, a mild dishwashing liquid and a soft bristle brush will do the trick, making maintenance a breeze. See page 50 for details.

#### **QUALITY CONSTRUCTION**

**Factory Built** 

Every **WeatherStrong®** cabinet is built to order, arriving ready for installation. We use a combination of waterproof ¾" **All-Weatherboard®** composite material, High-Density Polyethylene (HDPE), precision dowels, and stainless steel confirmat screws. This combination guarantees a sturdy construction with excellent strength, ensuring your cabinets will last through the seasons.

#### THOUGHTFUL DESIGN

Limitations for Optimal Use

While our Solid and Woodgrain finishes are perfect for outdoor settings, they are not recommended for areas where surface temperatures exceed 265°F. This ensures that your finishes stay pristine, and your cabinets remain durable.

#### **SALT WATER ENVIRONMENTS**

Live near the coast? **WeatherStrong®** has you covered! Our stainless steel components are designed to withstand those conditions. However, oceanfront environments with salt air and sea spray require regular maintenance to prevent rust from forming. Regular cleaning of stainless steel hardware will help resist corrosion and staining.

#### **VERSATILE INSTALLATION**

Installation to Exterior Walls

**WeatherStrong®** cabinets can be seamlessly integrated into both outdoor and indoor spaces. For exterior installations on stucco, brick, or concrete walls, we recommend using stainless steel Tapcon® fasteners. These ensure a secure attachment, refer to Tapcon® for specific recommendations for the number of fasteners needed based on cabinet size. This will quarantee stability and safety.

#### THE LIFETIME LIMITED WARRANTY

We stand by our products with a Lifetime Limited Warranty, giving you peace of mind that your investment is protected. Our commitment to quality means that you can trust your **WeatherStrong®** cabinets to withstand the test of time, no matter what the weather brings.

#### MADE IN THE USA

**WeatherStrong®** cabinets are proudly made in the USA, ensuring high-quality craftsmanship and supporting local manufacturing.

Discover the **WeatherStrong®** difference for yourself and transform your outdoor space with confidence and style. Experience unparalleled durability, easy maintenance, and quality construction that stands up to the elements, all backed by our Lifetime Limited Warranty.







### **DOOR STYLES**





#### **DAYTONA**

- 5/8" thick flat panel door with an extended stile cottage-inspired routed center panel design in a durable and color through High-Density Polyethylene (HDPE) finish
- Fully concealed stainless steel, soft-close hinges
- Side-mounted, ball bearing, stainless steel, soft-close drawer runners
- Decorative hardware required and sold separately. See page 39 for details
- Lifetime Limited Warranty





#### MIAMI

- 5/8" thick flat panel door in a durable and color through High-Density Polyethylene (HDPE) finish
- Fully concealed stainless steel, soft-close hinges
- Side-mounted, ball bearing, stainless steel, soft-close drawer runners
- Decorative hardware required and sold separately. See page 39 for details.
- Lifetime Limited Warranty





#### **SANIBEL**

- 5/8" thick flat panel door with an extended stile shaker-inspired routed center panel design in a durable and color through High-Density Polyethylene (HDPE) finish
- Fully concealed stainless steel, soft-close hinges
- Side-mounted, ball bearing, stainless steel, soft-close drawer runners
- Decorative hardware required and sold separately. See page 39 for details
- Lifetime Limited Warranty





#### **TAMPA**

- 5/8" thick flat panel door with an extended stile louver-inspired routed center panel design in a durable and color through High-Density Polyethylene (HDPE) finish
- Fully concealed stainless steel, soft-close hinges
- Side-mounted, ball bearing, stainless steel, soft-close drawer runners
- Decorative hardware required and sold separately. See page 39 for details
- Lifetime Limited Warranty

Images are computer generated and should not be used for true color representation or color matching. Please order a sample to view the actual color of the door in your space and light.




## FINISHES & EDGE BAND COLORS

### **HDPE SOLID DOOR FINISHES - Lifetime Limited Warranty**



#### **HDPE WOODGRAIN DOOR FINISHES - Lifetime Limited Warranty**

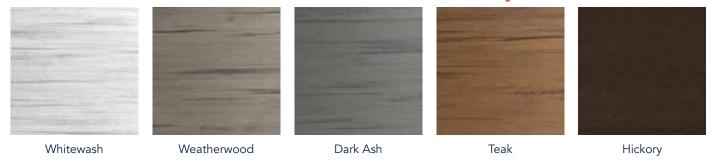



Mahogany



Ironwood

COORDINA' Color Name	TING EDGE BANDING COLORS Edge Banding Color
Bluff Beige	White
Dark Ash	Gray
Dock Brown	Black
Emerald Green	Gray
Hickory	Black
Ironwood	Black
Lighthouse Gray	Gray
Mahogany	Black
Pitch Black	Black
Reef Blue	Gray
Sapphire Blue	Black
Shoreline Gray	Gray
Shell White	White
Teak	Gray
Weatherwood	Gray
Wrought Iron	Black
Whitewash	White

7

## **IMPORTANT - GRILL AND SIDE BURNER BASES**



#### **INSULATING JACKET REQUIRED**

Customer Responsibility:

Grill, griddle, and side burner bases must be installed with the grill manufacturers specified insulation jacket to maintain warranty coverage.



Grill Insulating Jacket



Side Burner Insulating Jacket



## **GRILL BASE CABINETS**


Grill Cabinet Coding					
GB 36 30 IB					
GB Cabinet Code	36 Width	30 Depth	IB Full-Back		

#### **FEATURES**

- The face plate is modified in field to accept the respective insulating jacket used with the gas grill
- Includes Sure Level polymer legs, shipped loose for field installation and leveling. Upgraded stainless steel Sure Level legs are available
- Stainless steel handles are required and sold separately. See page 39 for details
- Side Burner and Grill Base cabinet sides feature two vent cutouts, designed to promote air flow through the cabinetry, and to prevent any possible buildup from a propane or natural gas leak

#### **PLEASE NOTE**

All built in grill heads require an insulating jacket. Please consult your grill manufacturer for the appropriate model.




#### **GRILL DOUBLE DOOR BASE**

Item Number	Width	Depth	Height
GB36IB	36	27	34.5
GB3630IB	36	30	34.5
GB42IB	42	27	34.5
GB4230IB	42	30	34.5
GB48IB	48	27	34.5
GB4830IB	48	30	34.5



- Grill cabinets are manufactured with two full upper face plates that will need to be field modified to accept the insulating jacket used with the gas grill.
- Under no circumstance should a grill be installed without the appropriate insulating jacket specified by the appliance manufacturer or warranty is voided.


## **GRILL BASE CABINETS**



# EXTENDED APRON GRILL DOUBLE DRAWER BASE

Item Number	Width	Depth	Height
GBP48IB	48	30	34.5





#### **GRILL FOUR DOOR BASE**

Item Number	Width	Depth	Height
GB60IB	60	30	34.5



The extended apron grill base is engineered for grills with insulating jackets that require a taller apron cut. Hybrid and Pellet grills are just a couple examples. The apron space on this grill is 18" in height and will need to be cut on the job site. Please consult your grill manufacture install instructions for the correct height required. Two drawers at the bottom allow for storage of grill pellets or other grilling accessories.

## **SIDE BURNER CABINETS**

Side Burner Cabinet Coding					
SBB 18 27 L IB					
SBB	18	27	L	IB	
Cabinet Code	Width	Depth	Left Hinge	Full-Back	

#### **FEATURES**


- The face plate is modified in field to accept the respective insulating jacket used with the side burner
- 3/4 " All-Weatherboard® composite material cabinet construction
- Includes Sure Level polymer legs, shipped loose for field installation and leveling. Upgraded stainless steel Sure Level legs are available
- Fully integrated back panel
- Available in all door styles and finishes

#### **PLEASE NOTE**

All built in side burners require an insulated jacket. Please consult your side burner manufacturer for the appropriate model.


Stainless steel handles are required and sold separately. See page 39 for details.

- Grill and side burner cabinets are manufactured with two full upper face plates that will need to be field modified to accept the respective insulating jacket used with the gas grill or side burner.
- Under no circumstance should a grill or side burner be installed without the appropriate insulating jacket specified by the manufacturer of the appliance.



#### SIDE BURNER SINGLE DOOR BASE


Item Number	Width	Depth	Height
SBB15LIB	15	27	34.5
SBB15RIB	15	27	34.5
SBB1530LIB	15	30	34.5
SBB1530RIB	15	30	34.5
SBB18LIB	18	27	34.5
SBB18RIB	18	27	34.5
SBB1830LIB	18	30	34.5
SBB1830RIB	18	30	34.5
SBB21LIB	21	27	34.5
SBB21RIB	21	27	34.5
SBB2130LIB	21	30	34.5
SBB2130RIB	21	30	34.5



#### SIDE BURNER DOUBLE DOOR BASE

Item Number	Width	Depth	Height
SBB24IB	24	27	34.5
SBB2430IB	24	30	34.5
SBB30IB	30	27	34.5
SBB3030IB	30	30	34.5

## KAMADO GRILL BASE CABINET



#### KAMADO BASE CABINET TIP

Kamado grill base cabinet requires the use of an outdoor counter surface on top of the base. This is where the grill will set. Please consult the grill manufacture for surrounding clearance and installation of the grill.

#### **KAMADO GRILL BASE**

Item Number	Width	Depth	Height
B302718FHIB	30	27	22.5
B362718FHIB	36	27	22.5



Base Cabinet Coding					
	В	12 18	FH L	IB	
В	12	18	FH	L	IB
Cabinet Code	Width	Depth	Full- Height Door	Left Hinge	Full-Back

Drawer Base Cabinet Coding					
B 3D 12 27 IB					
В	3D	12	27	IB	
Cabinet Code	Three Drawers	Width	Depth	Full-Back	

#### **FEATURES**

- Two full depth-adjustable shelves
- 3/4" All-Weatherboard® composite material cabinet construction
- Fully integrated back panel
- Includes Sure Level polymer legs, shipped loose for field installation and leveling. Upgraded stainless steel Sure Level legs are available
- Available in all door styles and finishes
- Stainless steel handles are required and sold



#### **BASE CABINETS**

Base cabinet construction features a 30" high cabinet box, which must be mounted on-site on 4  $\frac{1}{2}$ " high Sure Level adjustable polymer legs. Legs are adjustable from 4" to 5  $\frac{1}{2}$ " high. Optional stainless steel adjustable legs are available as an accessory. Optional snap on matching toe kick panels are available 6" high x 96" long, for site modification and installation.

Our base cabinets feature a full-height ¾" thick enclosed **All-Weatherboard®** composite material back panel. Base cabinets can be installed as a freestanding island, or as a peninsula extending from a wall.


#### **FEATURES**

- 3/4" All-Weatherboard® composite material cabinet construction
- Fully integrated back panel
- Includes Sure Level polymer legs, shipped loose for field installation and leveling. Upgraded stainless steel Sure Level legs are available
- Available in all door styles and finishes
- 316 stainless steel handles are required and sold separately. See page 39 for details.
- Top drawer front is 6" high
- On three drawer bases bottom drawer fronts are 12" high
- On four drawer bases bottom drawer fronts are 8" high

#### **BASE CABINET TIP**

Base cabinets are great for use as a free standing island and in wide open areas. The fully integrated back panels provide a factory built barrier against debris entering the cabinet. Exposed backs and sides require the use of Base or Island Panels. See pg 33-34 for size availabilty.





# FULL HEIGHT SINGLE DOOR WITH PROPANE PULL-OUT


#### **SPECIFY RIGHT OR LEFT HINGED**

Item Number	Width	Depth	Height
B18FHLIB-PP	18	24	34.5
B18FHRIB-PP	18	24	34.5
B1827FHLIB-PP	18	27	34.5
B1827FHRIB-PP	18	27	34.5
B21FHLIB-PP	21	24	34.5
B21FHRIB-PP	21	24	34.5
B2127FHLIB-PP	21	27	34.5
B2127FHRIB-PP	21	27	34.5

#### **FEATURES**

- Pull-out features soft-close, side-mounted, ball bearing stainless steel drawer runners
- Weather proof inset handle for easy grip
- Circular cut-out for up to a standard 20lb propane tank





# FULL HEIGHT SINGLE DOOR WITH TRASH CAN PULL-OUT


#### **SPECIFY RIGHT OR LEFT HINGED**

Item Number	Width	Depth	Height	
B18FHLIB-TC	18	24	34.5	
B18FHRIB-TC	18	24	34.5	
B1827FHLIB-TC	18	27	34.5	
B1827FHRIB-TC	18	27	34.5	
B21FHLIB-TC	21	24	34.5	
B21FHRIB-TC	21	24	34.5	
B2127FHLIB-TC	21	27	34.5	
B2127FHRIB-TC	21	27	34.5	

#### **FEATURES**

- Pull-out features soft-close, side-mounted, ball bearing stainless steel drawer runners
- Weather proof inset handle for easy grip
- Removable 35 quart capacity plastic bin






# FULL HEIGHT SINGLE DOOR WITH 1 ROLL-OUT TRAY

#### **SPECIFY RIGHT OR LEFT HINGED**

Item Number	Width	Depth	Height
B12FHLIB-1T	12	24	34.5
B12FHRIB-1T	12	24	34.5
B1227FHLIB-1T*	12	27	34.5
B1227FHRIB-1T*	12	27	34.5
B15FHLIB-1T	15	24	34.5
B15FHRIB-1T	15	24	34.5
B1527FHLIB-1T*	15	27	34.5
B1527FHRIB-1T*	15	27	34.5
B18FHLIB-1T	18	24	34.5
B18FHRIB-1T	18	24	34.5
B1827FHLIB-1T*	18	27	34.5
B1827FHRIB-1T*	18	27	34.5
B21FHLIB-1T	21	24	34.5
B21FHRIB-1T	21	24	34.5
B2127FHLIB-1T*	21	27	34.5
B2127FHRIB-1T*	21	27	34.5

#### **FEATURES**

- Roll-out tray features soft-close, side-mounted, ball bearing stainless steel drawer runners
- Roll-out tray is 6" high by 21 ¾" deep, and is constructed of ¾" All-Weatherboard® composite material construction, sides and bottom panel
- Only available in 24" and 27" depth
- One full-depth adjustable shelf



# FULL HEIGHT SINGLE DOOR WITH 2 ROLL-OUT TRAYS

#### **SPECIFY RIGHT OR LEFT HINGED**


Item Number	Width	Depth	Height
B12FHLIB-2T	12	24	34.5
B12FHRIB-2T	12	24	34.5
B1227FHLIB-2T*	12	27	34.5
B1227FHRIB-2T*	12	27	34.5
B15FHLIB-2T	15	24	34.5
B15FHRIB-2T	15	24	34.5
B1527FHLIB-2T*	15	27	34.5
B1527FHRIB-2T*	15	27	34.5
B18FHLIB-2T	18	24	34.5
B18FHRIB-2T	18	24	34.5
B1827FHLIB-2T*	18	27	34.5
B1827FHRIB-2T*	18	27	34.5
B21FHLIB-2T	21	24	34.5
B21FHRIB-2T	21	24	34.5
B2127FHLIB-2T*	21	27	34.5
B2127FHRIB-2T*	21	27	34.5

#### **FEATURES**

- Roll-out trays feature soft-close, side-mounted, ball bearing stainless steel drawer runners
- Roll-out trays are 6" high by 21 ¾" deep, and are constructed of ¾" **All-Weatherboard®** composite material construction, sides and bottom panel
- Only available in 24" and 27" depth

\*27" deep base cabinets have the same roll-out tray as the 24" deep cabinets

<sup>\*27&</sup>quot; deep base cabinets have the same roll-out tray as the 24" deep cabinets




# FULL HEIGHT DOUBLE DOOR WITH 1 ROLL-OUT TRAY


Item Number	Width	Depth	Height
B24FHIB-1T	24	24	34.5
B2427FHIB-1T*	24	27	34.5
B27FHIB-1T	27	24	34.5
B2727FHIB-1T*	27	27	34.5
B30FHIB-1T	30	24	34.5
B3027FHIB-1T*	30	27	34.5
B33FHIB-1T	33	24	34.5
B3327FHIB-1T*	33	27	34.5
B36FHIB-1T	36	24	34.5
B3627FHIB-1T*	36	27	34.5

#### **FEATURES**

- Roll-out tray features soft-close, side-mounted, ball bearing stainless steel drawer runners
- Roll-out tray is 6" high by 21 ¾" deep, and is constructed of ¾" **All-Weatherboard®** composite material construction, sides and bottom panel
- Only available in 24" and 27" depth
- One full-depth adjustable shelf

\*27" deep base cabinets have the same roll-out tray as the 24" deep cabinets





# FULL HEIGHT DOUBLE DOOR WITH 2 ROLL-OUT TRAYS

Item Number	Width	Depth	Height
B24FHIB-2T	24	24	34.5
B2427FHIB-2T*	24	27	34.5
B27FHIB-2T	27	24	34.5
B2727FHIB-2T*	27	27	34.5
B30FHIB-2T	30	24	34.5
B3027FHIB-2T*	30	27	34.5
B33FHIB-2T	33	24	34.5
B3327FHIB-2T*	33	27	34.5
B36FHIB-2T	36	24	34.5
B3627FHIB-2T*	36	27	34.5

#### **FEATURES**


- Roll-out trays feature soft-close, side-mounted, ball bearing stainless steel drawer runners
- Roll-out trays are 6" high by 21 ¾" deep, and are constructed of ¾" **All-Weatherboard®** composite material construction, sides and bottom panel
- Only available in 24" and 27" depth

\*27" deep base cabinets have the same roll-out tray as the 24" deep cabinets

#### **DESIGN TIP**

When creating a corner, where there is a grill or other appliance close, make sure to leave enough clearance. This can be designed using fillers to create the corner. This will allow your adjacent drawers/doors to open and not collide with the appliance.






# SINGLE DOOR & DRAWER WITH 1 ROLL-OUT TRAY

#### **SPECIFY RIGHT OR LEFT HINGED**

Item Number	Width	Depth	Height
B12LIB-1T	12	24	34.5
B12RIB-1T	12	24	34.5
B1227LIB-1T*	12	27	34.5
B1227RIB-1T*	12	27	34.5
B15LIB-1T	15	24	34.5
B15RIB-1T	15	24	34.5
B1527LIB-1T*	15	27	34.5
B1527RIB-1T*	15	27	34.5
B18LIB-1T	18	24	34.5
B18RIB-1T	18	24	34.5
B1827LIB-1T*	18	27	34.5
B1827RIB-1T*	18	27	34.5
B21LIB-1T	21	24	34.5
B21RIB-1T	21	24	34.5
B2127LIB-1T*	21	27	34.5
B2127RIB-1T*	21	27	34.5

#### **FEATURES**

- Roll-out tray features soft-close, side-mounted, ball bearing stainless steel drawer runners
- Roll-out tray is 6" high by 21 ¾" deep, and is constructed of ¾" **All-Weatherboard®** composite material construction, sides and bottom panel
- Only available in 24" and 27" depth
- One full-depth adjustable shelf



# SINGLE DOOR & DRAWER WITH 2 ROLL-OUT TRAYS

#### **SPECIFY RIGHT OR LEFT HINGED**

Item Number	Width	Depth	Height
B12LIB-2T	12	24	34.5
B12RIB-2T	12	24	34.5
B1227LIB-2T*	12	27	34.5
B1227RIB-2T*	12	27	34.5
B15LIB-2T	15	24	34.5
B15RIB-2T	15	24	34.5
B1527LIB-2T*	15	27	34.5
B1527RIB-2T*	15	27	34.5
B18LIB-2T	18	24	34.5
B18RIB-2T	18	24	34.5
B1827LIB-2T*	18	27	34.5
B1827RIB-2T*	18	27	34.5
B21LIB-2T	21	24	34.5
B21RIB-2T	21	24	34.5
B2127LIB-2T*	21	27	34.5
B2127RIB-2T*	21	27	34.5


#### **FEATURES**

- Roll-out trays feature soft-close, side-mounted, ball bearing stainless steel drawer runners
- Roll-out tray is 6" high by 21 ¾" deep, and is constructed of ¾" **All-Weatherboard®** composite material construction, sides and bottom panel



<sup>\*27&</sup>quot; deep base cabinets have the same roll-out tray as the 24" deep cabinets

<sup>\*27&</sup>quot; deep base cabinets have the same roll-out tray as the 24" deep cabinets




# DOUBLE DOOR & DRAWER WITH 1 ROLL-OUT TRAY

Item Number	Width	Depth	Height
B24IB-1T	24	24	34.5
B2427IB-1T*	24	27	34.5
B27IB-1T	27	24	34.5
B2727IB-1T*	27	27	34.5
B30IB-1T	30	24	34.5
B3027IB-1T*	30	27	34.5
B33IB-1T	33	24	34.5
B3327IB-1T*	33	27	34.5
B36IB-1T	36	24	34.5
B3627IB-1T*	36	27	34.5

#### **FEATURES**

- Roll-out tray features soft-close, side-mounted, ball bearing stainless steel drawer runners
- Roll-out tray is 6" high by 21 ¾" deep, and is constructed of ¾" **All-Weatherboard®** composite material construction, sides and bottom panel
- One full-depth adjustable shelf



# DOUBLE DOOR & DRAWER WITH 2 ROLL-OUT TRAYS

Item Number	Width	Depth	Height
B24IB-2T	24	24	34.5
B2427IB-2T*	24	27	34.5
B27IB-2T	27	24	34.5
B2727IB-2T*	27	27	34.5
B30IB-2T	30	24	34.5
B3027IB-2T*	30	27	34.5
B33IB-2T	33	24	34.5
B3327IB-2T*	33	27	34.5
B36IB-2T	36	24	34.5
B3627IB-2T*	36	27	34.5


#### **FEATURES**

- Roll-out trays feature soft-close, side-mounted, ball bearing stainless steel drawer runners
- Roll-out tray is 6" high by 21 ¾" deep, and is constructed of ¾" **All-Weatherboard®** composite material construction, sides and bottom panel

\*27" deep base cabinets have the same roll-out tray as the 24" deep cabinets



<sup>\*27&</sup>quot; deep base cabinets have the same roll-out tray as the 24" deep cabinets




#### **SINGLE DOOR & DRAWER**

#### **SPECIFY RIGHT OR LEFT HINGED**

Item Number	Width	Depth	Height
B12LIB	12	24	34.5
B12RIB	12	24	34.5
B1227LIB	12	27	34.5
B1227RIB	12	27	34.5
B15LIB	15	24	34.5
B15RIB	15	24	34.5
B1527LIB	15	27	34.5
B1527RIB	15	27	34.5
B18LIB	18	24	34.5
B18RIB	18	24	34.5
B1827LIB	18	27	34.5
B1827RIB	18	27	34.5
B21LIB	21	24	34.5
B21RIB	21	24	34.5
B2127LIB	21	27	34.5
B2127RIB	21	27	34.5

#### **FEATURES**

- Drawer features soft-close, side-mounted, ball bearing stainless steel drawer runners
- Single full depth adjustable shelf



#### **DOUBLE DOOR & DRAWER**

Item Number	Width	Depth	Height
B24IB	24	24	34.5
B2427IB	24	27	34.5
B27IB	27	24	34.5
B2727IB	27	27	34.5
B30IB	30	24	34.5
B3027IB	30	27	34.5
B33IB	33	24	34.5
B3327IB	33	27	34.5
B36IB	36	24	34.5
B3627IB	36	27	34.5

#### **FEATURES**

- Drawer features soft-close, side-mounted, ball bearing stainless steel drawer runners
- Single full depth adjustable shelf


#### **MEASUREMENTS TO KEEP IN MIND**

It is important to make sure there is enough room between appliance and walkways.

- Grill/Pizza oven 24" on one side and 12" on the other counter space is recommended
- Sink 18" on each side
- Refrigerators- 15" of counter space around or above
- Side burners/ cooktops- 12" on each side
- Minimum workspace 36" w x 24" d
- Minimum storage 21" linear storage.

These are recommendations to help keep your installation practical.






### **FULL HEIGHT SINGLE DOOR**

#### **SPECIFY RIGHT OR LEFT HINGED**

SPECIFI RIGHT OR L	ELI UIIA	JED	
Item Number	Width	Depth	Height
B1218FHLIB	12	18	34.5
B1218FHRIB	12	18	34.5
B1221FHLIB	12	21	34.5
B1221FHRIB	12	21	34.5
B12FHLIB	12	24	34.5
B12FHRIB	12	24	34.5
B1227FHLIB	12	27	34.5
B1227FHRIB	12	27	34.5
B1518FHLIB	15	18	34.5
B1518FHRIB	15	18	34.5
B1521FHLIB	15	21	34.5
B1521FHRIB	15	21	34.5
B15FHLIB	15	24	34.5
B15FHRIB	15	24	34.5
B1527FHLIB	15	27	34.5
B1527FHRIB	15	27	34.5
B1818FHLIB	18	18	34.5
B1818FHRIB	18	18	34.5
B1821FHLIB	18	21	34.5
B1821FHRIB	18	21	34.5
B18FHLIB	18	24	34.5
B18FHRIB	18	24	34.5
B1827FHLIB	18	27	34.5
B1827FHRIB	18	27	34.5
B2118FHLIB	21	18	34.5
B2118FHRIB	21	18	34.5
B2121FHLIB	21	21	34.5
B2121FHRIB	21	21	34.5
B21FHLIB	21	24	34.5
B21FHRIB	21	24	34.5
B2127FHLIB	21	27	34.5
B2127FHRIB	21	27	34.5

#### **FEATURES**

• Two full depth adjustable shelves




#### **FULL HEIGHT DOUBLE DOOR**

Item Number	Width	Depth	Height
B2418FHIB	24	18	34.5
B2421FHIB	24	21	34.5
B24FHIB	24	24	34.5
B2427FHIB	24	27	34.5
B2718FHIB	27	18	34.5
B2721FHIB	27	21	34.5
B27FHIB	27	24	34.5
B2727FHIB	27	27	34.5
B3018FHIB	30	18	34.5
B3021FHIB	30	21	34.5
B30FHIB	30	24	34.5
B3027FHIB	30	27	34.5
B3318FHIB	33	18	34.5
B3321FHIB	33	21	34.5
B33FHIB	33	24	34.5
B3327FHIB	33	27	34.5
B3618FHIB	36	18	34.5
B3621FHIB	36	21	34.5
B36FHIB	36	24	34.5
B3627FHIB	36	27	34.5

#### **FEATURES**

• Two full depth adjustable shelves






#### **3 DRAWER BASE**

Item Number	Width	Depth	Height
B3D12IB	12	24	34.5
B3D1227IB	12	27	34.5
B3D15IB	15	24	34.5
B3D1527IB	15	27	34.5
B3D18IB	18	24	34.5
B3D1827IB	18	27	34.5
B3D21IB	21	24	34.5
B3D2127IB	21	27	34.5
B3D24IB	24	24	34.5
B3D2427IB	24	27	34.5

#### **FEATURES**

- Top drawer front is 6" high
- Middle and bottom drawer fronts are 12" high
- Drawers feature soft-close, side-mounted, ball bearing stainless steel drawer runners



#### **4 DRAWER BASE**

Item Number	Width	Depth	Height
B4D12IB	12	24	34.5
B4D1227IB	12	27	34.5
B4D15IB	15	24	34.5
B4D1527IB	15	27	34.5
B4D18IB	18	24	34.5
B4D1827IB	18	27	34.5
B4D21IB	21	24	34.5
B4D2127IB	21	27	34.5
B4D24IB	24	24	34.5
B4D2427IB	24	27	34.5

#### **FEATURES**


- Top drawer front is 6" high
- Bottom three drawer fronts are 8" high
- Drawers feature soft-close, side-mounted, ball bearing stainless steel drawer runners

#### "ZONES" TO KEEP IN MIND

When designing your kitchen you want to make sure each of your appliances are easily accessible. To help in doing this it's important to think in zones.

- Hot Zone: This is the heart of the kitchen, where you will have heat admitting appliances.
- Dry Zone: This is a food preparation area. You will want an area of counter space that is near the Hot Zone.
- Wet Zone: Area with your sink that can be near your Dry zone. This zone should not infringe on your prep station
- Cold Zone: This will be your refrigerator or cold storage appliances. This zone should be kept away from the Hot Zone.






#### **WIDE 3 DRAWER BASE**

Item Number	Width	Depth	Height
B3D27IB	27	24	34.5
B3D2727IB	27	27	34.5
B3D30IB	30	24	34.5
B3D3027IB	30	27	34.5
B3D33IB	33	24	34.5
B3D3327IB	33	27	34.5
B3D36IB	36	24	34.5
B3D3627IB	36	27	34.5

#### **FEATURES**

- Top drawer front is 6" high
- Middle and bottom drawer fronts are 12" high
- Drawers feature soft-close, side-mounted ball bearing stainless steel drawer runners



#### **WIDE 4 DRAWER BASE**


Item Number	Width	Depth	Height
B4D27IB	27	24	34.5
B4D2727IB	27	27	34.5
B4D30IB	30	24	34.5
B4D3027IB	30	27	34.5
B4D33IB	33	24	34.5
B4D3327IB	33	27	34.5
B4D36IB	36	24	34.5
B4D3627IB	36	27	34.5

#### **FEATURES**

- Top drawer front is 6" high
- Bottom three drawer fronts are 8" high
- Drawers feature soft-close, side-mounted ball bearing stainless steel drawer runners

#### **HOW MUCH BUFFER SPACE WILL I NEED?**


In addition to the three feet of prep space, you'll need to consider the amount of "landing space" for each appliance in your outdoor kitchen to ensure it's a safe distance from walkways and from other appliances. Our recommendations are:



- Sink: 18" on each side
- Refrigerator: 15" of counter space above or around the fridge
- Side burner/cooktop: 12" on each side

Of course, these "buffer zones" can contribute to the 36" of uninterrupted prep space mentioned earlier. Just be sure to consider the practical side of getting everything to fit, such as whether you want underthe-counter appliances such as a mini refrigerator to be right at your legs where you'll be doing the bulk of your prep work.






#### **DOUBLE DOOR SINK BASE**

Item Number	Width	Depth	Height
SB2418IB	24	18	34.5
SB2421IB	24	21	34.5
SB24IB	24	24	34.5
SB2427IB	24	27	34.5
SB2718IB	27	18	34.5
SB2721IB	27	21	34.5
SB27IB	27	24	34.5
SB2727IB	27	27	34.5
SB3018IB	30	18	34.5
SB3021IB	30	21	34.5
SB30IB	30	24	34.5
SB3027IB	30	27	34.5
SB3318IB	33	18	34.5
SB3321IB	33	21	34.5
SB33IB	33	24	34.5
SB3327IB	33	27	34.5
SB3618IB	36	18	34.5
SB3621IB	36	21	34.5
SB36IB	36	24	34.5
SB3627IB	36	27	34.5

#### **FEATURES**

- False drawer front to accommodate sink
- No adjustable shelf



#### **BLIND BASE**

#### **SPECIFY RIGHT OR LEFT HINGED (LEFT SHOWN)**


Item Number	Width	Depth	Height
BBCU3918FHLIB	36	18	34.5
BBCU3918FHRIB	36	18	34.5
BBCU3921FHLIB	36	21	34.5
BBCU3921FHRIB	36	21	34.5
BBCU39FHLIB	36	24	34.5
BBCU39FHRIB	36	24	34.5
BBCU3927FHLIB	36	27	34.5
BBCU3927FHRIB	36	27	34.5

#### **FEATURES**

- Two reduced depth adjustable shelves
- 3" filler, 3" & 6" overlay fillers included
- Door width is 12", opening is 10 ½"


**BLIND BASE INSTALLATION TIP ON PAGE 24** 



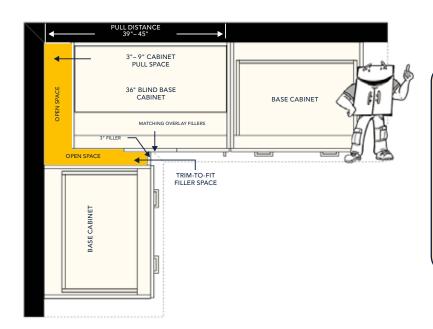

#### **BLIND BASE TIP**

The Blind Base cabinet is 36" wide. It must be installed from 3" to 9" away from the adjacent wall. This allows the door full clearance and provides a flexible installation range. From the adjacent wall to the far edge of the cabinet, a minimum width of 39" to a maximum width of 45" is required.




#### **COUNTERTOP SUPPORT END**

Item Number	Width	Depth	Height
CSE1830	6	18	34.5
CSE2130	6	21	34.5
CSE2430	6	24	34.5
CSE2730	6	27	34.5
CSE3030	6	30	34.5

#### **FEATURES**

- Securely supports a countertop at the end of a run of cabinets and appliances
- Can be used to replace a cabinet at the end of a kitchen island
- Includes 6" wide x 30" flat-panel for field installation
- Gray **All-Weatheboard®** construction



#### **REFRIGERATOR BACKER**

Item Number	Width	Depth	Height
WSRBK1530	4.5	15	30
WSRBK2430	4.5	24	30

#### **FEATURES**

- Designed to provide perfect spacing between two cabinets for an under counter appliance
- Gray All-Weatheboard® construction



Wall Cabinet Coding					
	w s	80 09 15	IB		
W Cabinet Code	30 Width	09 Depth	15 Height	IB Full-Back	

#### **FEATURES**

- 3/4" All-Weatherboard® composite material cabinet construction
- Fully integrated back panel
- 316 Stainless steel handles are required and sold separately. See page 39 for details.

#### **PLEASE NOTE**

24" high wall cabinets measure 23 ¾"

If the sides of the wall cabinet will be exposed, make sure to order Matching Wall End Panel to cover the sides.

Do not place bridge cabinets over a heat emitting appliance, even if there is a range hood. The heat could damage the front of the cabinet.

#### **DESIGN TIP**


Wall cabinets can provide excellent additional storage.

It is important to space plan when using wall cabinets to ensure there is proper distance from your heat emitting appliance and the start of your wall cabinet run.

If you have an area where you need a narrow storage, you can use a wall cabinet. Simply order an extra set of legs or have the installer build a platform under and cover with toe kick material. Much like you would do in an indoor kitchen.

As the cabinets are full overlay frameless, fillers must be used if the cabinet is going against a side wall.






#### **DOUBLE DOOR BRIDGE**

DOUBLE DOO	K DKIL	JGE	
Item Number	Width	Depth	Height
15" High			
W300915IB	30	9	15
W3015IB	30	12	15
W301515IB	30	15	15
W330915IB	33	9	15
W3315IB	33	12	15
W331515IB	33	15	15
W360915IB	36	9	15
W3615IB	36	12	15
W361515IB	36	15	15
18" High			
W300918IB	30	9	18
W3018IB	30	12	18
W301518IB	30	15	18
W330918IB	33	9	18
W3318IB	33	12	18
W331518IB	33	15	18
W360918IB	36	9	18
W3618IB	36	12	18
W361518IB	36	15	18
24" High			
W300924IB	30	9	24
W3024IB	30	12	24
W301524IB	30	15	24
W330924IB	33	9	24
W3324IB	33	12	24
W331524IB	33	15	24
W360924IB	36	9	24
W3624IB	36	12	24
W361524IB	36	15	24

#### **FEATURES**

• No interior shelves included



### **30" HIGH SINGLE DOOR**


#### **SPECIFY RIGHT OR LEFT HINGED**

Item Number	Width	Depth	Height		
W120930LIB	12	9	30		
W120930RIB	12	9	30		
W1230LIB	12	12	30		
W1230RIB	12	12	30		
W121530LIB	12	15	30		
W121530RIB	12	15	30		
W150930LIB	15	9	30		
W150930RIB	15	9	30		
W1530LIB	15	12	30		
W1530RIB	15	12	30		
W151530LIB	15	15	30		
W151530RIB	15	15	30		
W180930LIB	18	9	30		
W180930RIB	18	9	30		
W1830LIB	18	12	30		
W1830RIB	18	12	30		
W181530LIB	18	15	30		
W181530RIB	18	15	30		
W210930LIB	21	9	30		
W210930RIB	21	9	30		
W2130LIB	21	12	30		
W2130RIB	21	12	30		
W211530LIB	21	15	30		
W211530RIB	21	15	30		

#### **FEATURES**

• 2 full depth adjustable shelves






#### 30" HIGH DOUBLE DOOR

#### **SPECIFY RIGHT OR LEFT HINGED**

Item Number	Width	Depth	Height
W240930IB	24	9	30
W2430IB	24	12	30
W241530IB	24	15	30
W270930IB	27	9	30
W2730IB	27	12	30
W271530IB	27	15	30
W300930IB	30	9	30
W3030IB	30	12	30
W301530IB	30	15	30
W330930IB	33	9	30
W3330IB	33	12	30
W331530IB	33	15	30
W360930IB	36	9	30
W3630IB	36	12	30
W361530IB	36	15	30

#### **FEATURES**

• 2 full depth adjustable shelves




### **36" HIGH SINGLE DOOR**

#### **SPECIFY RIGHT OR LEFT HINGED**

SPECIFY RIGHT OR LEFT HINGED					
Item Number	Width	Depth	Height		
W120936LIB	12	9	36		
W120936RIB	12	9	36		
W1236LIB	12	12	36		
W1236RIB	12	12	36		
W121536LIB	12	15	36		
W121536RIB	12	15	36		
W150936LIB	15	9	36		
W150936RIB	15	9	36		
W1536LIB	15	12	36		
W1536RIB	15	12	36		
W151536LIB	15	15	36		
W151536RIB	15	15	36		
W180936LIB	18	9	36		
W180936RIB	18	9	36		
W1836LIB	18	12	36		
W1836RIB	18	12	36		
W181536LIB	18	15	36		
W181536RIB	18	15	36		
W210936LIB	21	9	36		
W210936RIB	21	9	36		
W2136LIB	21	12	36		
W2136RIB	21	12	36		
W211536LIB	21	15	36		
W211536RIB	21	15	36		

#### **FEATURES**

• 3 full depth adjustable shelves




#### **36" HIGH DOUBLE DOOR**

#### **SPECIFY RIGHT OR LEFT HINGED**

0. 20					
Width	Depth	Height			
24	9	36			
24	12	36			
24	15	36			
27	9	36			
27	12	36			
27	15	36			
30	9	36			
30	12	36			
30	15	36			
33	9	36			
33	12	36			
33	15	36			
36	9	36			
36	12	36			
36	15	36			
	24 24 24 27 27 27 30 30 30 33 33 33 33 36 36	24 9 24 12 24 15 27 9 27 12 27 15 30 9 30 12 30 15 33 9 33 12 33 15 36 9 36 12			

#### **FEATURES**

• 3 full depth adjustable shelves



### **42" HIGH SINGLE DOOR**


#### **SPECIFY RIGHT OR LEFT HINGED**

SPECIFY RIGHT OR I			11.1.1.
Item Number	Width	Depth	Height
W120942LIB	12	9	42
W120942RIB	12	9	42
W1242LIB	12	12	42
W1242RIB	12	12	42
W121542LIB	12	15	42
W121542RIB	12	15	42
W150942LIB	15	9	42
W150942RIB	15	9	42
W1542LIB	15	12	42
W1542RIB	15	12	42
W151542LIB	15	15	42
W151542RIB	15	15	42
W180942LIB	18	9	42
W180942RIB	18	9	42
W1842LIB	18	12	42
W1842RIB	18	12	42
W181542LIB	18	15	42
W181542RIB	18	15	42
W210942LIB	21	9	42
W210942RIB	21	9	42
W2142LIB	21	12	42
W2142RIB	21	12	42
W211542LIB	21	15	42
W211542RIB	21	15	42

#### **FEATURES**

• 3 full depth adjustable shelves






### **42" HIGH DOUBLE DOOR**

#### **SPECIFY RIGHT OR LEFT HINGED**

Item Number	Width	Depth	Height
W240942IB	24	9	42
W2442IB	24	12	42
W241542IB	24	15	42
W270942IB	27	9	42
W2742IB	27	12	42
W271542IB	27	15	42
W300942IB	30	9	42
W3042IB	30	12	42
W301542IB	30	15	42
W330942IB	33	9	42
W3342IB	33	12	42
W331542IB	33	15	42
W360942IB	36	9	42
W3642IB	36	12	42
W361542IB	36	15	42

#### **FEATURES**

• 3 full depth adjustable shelves




#### **BLIND WALL CABINETS**

#### **SPECIFY RIGHT OR LEFT HINGED**

Item Number	Width	Depth	Height
30" High			
WBCU270930LIB	24	9	30
WBCU270930RIB	24	9	30
WBCU2730LIB	24	12	30
WBCU2730RIB	24	12	30
WBCU271530LIB	24	15	30
WBCU271530RIB	24	15	30
36" High			
WBCU270936LIB	24	9	36
WBCU270936RIB	24	9	36
WBCU2736LIB	24	12	36
WBCU2736RIB	24	12	36
WBCU271536LIB	24	15	36
WBCU271536RIB	24	15	36
42" High			
WBCU270942LIB	24	9	42
WBCU270942RIB	24	9	42
WBCU2742LIB	24	12	42
WBCU2742RIB	24	12	42
WBCU271542LIB	24	15	42
WBCU271542RIB	24	15	42

#### **FEATURES**

- 30" height 2 reduced depth adjustable shelves
- 36" and 42" height 3 reduced depth adjustable shelves

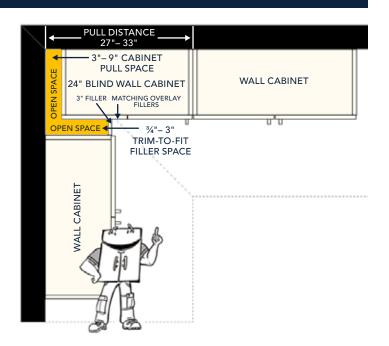


#### **BLIND WALL TIP**

The Blind Wall cabinet is 24" wide. It must be installed from 3" to 9" away from the adjacent wall. This allows the door full clearance and provides a flexible installation range. From the adjacent wall to the far edge of the cabinet, a minimum width of 27" to a maximum width of 33" is required.

## **UTILITY CABINETS**

Utility Cabinet Coding				
U 18 18 84 L				
U	18	18	84	L
Cabinet Code	Width	Depth	Height	Left Hinge




#### **UTILITY CABINET**

#### **SPECIFY RIGHT OR LEFT HINGED**

Item Number	Width	Depth	Height
U181884L	18	18	84
U181884R	18	18	84
U182184L	18	21	84
U182184R	18	21	84
U1884L	18	24	84
U1884R	18	24	84

#### **FEATURES**

• 4 full depth adjustable shelves

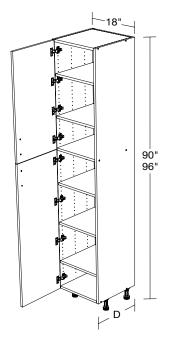

#### **UTILITY CABINET**

#### **SPECIFY RIGHT OR LEFT HINGED**


Item Number	Width	Depth	Height
90" High			
U181890L	18	18	90
U181890R	18	18	90
U182190L	18	21	90
U182190R	18	21	90
U1890L	18	24	90
U1890R	18	24	90
96" High			
U181896L	18	18	96
U181896R	18	18	96
U182196L	18	21	96
U182196R	18	21	96
U1896L	18	24	96
U1896R	18	24	96

#### **FEATURES**

• 5 full depth adjustable shelves

31

## UTILITY CABINETS WITH ROLL OUT TRAYS




#### **UTILITY CABINET**

#### **SPECIFY RIGHT OR LEFT HINGED**

Item Number	Width	Depth	Height
U1884L-4T	18	24	84
U1884R-4T	18	24	84

#### **FEATURES**

- 1 full depth adjustable shelves and 4 roll-out trays
- Roll-out trays feature soft-close, side-mounted, ball bearing stainless steel drawer runners
- Roll-out Tray is ¾" **All-Weatherboard®** composite material construction, sides and bottom panel

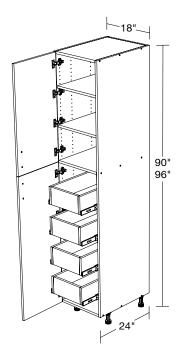

#### **UTILITY CABINET**

#### **SPECIFY RIGHT OR LEFT HINGED**

Item Number	Width	Depth	Height
90" High			
U1890L-4T	18	24	90
U1890R-4T	18	24	90
96" High			
U1896L-4T	18	24	96
U1896R-4T	18	24	96

#### **FEATURES**

- 2 full depth adjustable shelves and 4 roll-out trays
- Roll-out trays feature soft-close, side-mounted, ball bearing stainless steel drawer runners
- Roll-out Tray is ¾" **All-Weatherboard®** composite material construction, sides and bottom panel




## MATCHING END PANELS

#### **MATCHING BASE END PANEL**

#### **FEATURES**

- Panels designed to be flush with door. Field trim for desired size.
- Use to cover cabinet sides that are exposed to sunlight and other weather elements.

**BEP18 BEP21 BEP24 BEP27 BEP30** 




18 %" W, 21 %" W, 24 %" W, 27 %" W, 30 %" W


#### VENTED BASE END PANEL

#### **FEATURES**

venting.

- Panels designed to be flush with door. Field trim for desired size.
- Use to cover cabinet ends that are exposed to sunlight and other weather elements.





19 ½", 22 ½", 25 ½", 28 ½", 31 ½"


#### **VENTED BASE END PANEL – LEFT END**

#### **FEATURES**

**BEP24VL** BEP27VL

#### Panels designed to be flush with door. BEP30VL Field trim for desired size.

- Use to cover cabinet ends that are exposed to sunlight and other weather elements.
- Vent grills in the top and bottom of each panel for gas venting.




#### **VENTED BASE END PANEL – RIGHT END**

#### **FEATURES**

**BEP24VR** BEP27VR

- Panels designed to be flush with door.

  BEP30VR Field trim for desired size.
- Use to cover cabinet ends that are exposed to sunlight and other weather elements.
- Vent grills in the top and bottom of each panel for gas venting.




## MATCHING END PANELS

#### **MATCHING WALL END PANELS**

#### **FEATURES**

- Panels designed to be flush with doors. Field trim for desired size.
- Use to cover cabinet sides that are exposed to sunlight and other weather elements.



WEP0930A WEP0936A WEP0942A WEP1230A WEP1236A WEP1242A WEP1530A WEP1536A

#### MATCHING BASE TALL END PANEL

**BTP23** 

**BTP26** 

**BTP29** 

**BTP32** 

**BTP35** 


IPL4830 IPL4836

**IPL4842** 

**IPL4848** 

#### **FEATURES**

- Panels designed to be flush with door. Field trim for desired size.
- Use to cover cabinet sides that are exposed to sunlight and other weather elements.



23 ½" W, 26 ½" W, 29 ½" W, 32 ½" W, 35 ½" W

#### MATCHING TALL END PANEL

#### **FEATURES**


- Panels designed to be flush with door. Field trim for desired size.
- Two separate panels included.
- Use to cover cabinet sides that are exposed to sunlight and other weather elements.

30" 36" 42" 55½" 18 %", 21 %", 24 %" TEP1885
TEP1891
TEP1897
TEP2185
TEP2191
TEP2197
TEP2485
TEP2491
TEP2497

#### ISLAND BACK PANEL

#### **FEATURES**

- Field Trim for desired size.
- Use to cover cabinet backs that are exposed to sunlight and other weather elements.
- IPL4848 is not the true size, it measures 47.5H x 48W.



## **PARTS & ACCESSORIES**


96" Wide

**FS696A** 

#### 8' FINISHED TOE KICK -**MATCHES DOOR COLOR**

#### **FEATURES**

- Available in all finishes
- Will need to be cut to fit on the job site
- Toe kick clips will need to be added to allow attachment to the legs when needed




#### **ROLL-OUT TRAY**

#### **FEATURES**

- 3/4" All-Weatherboard® composite material construction, 4-sides and bottom panel
- Soft-close, side-mounted, ball bearing stainless steel runners and screws
- ROT12 fits 12" wide cabinet, etc.

Field installed



#### 3" WIDE FILLERS

#### **FEATURES**

Available in all finishes



30" Tall **FS330A** 36" Tall **FS336A** 42" Tall **FS342A** 84" Tall **FS384A** 90" Tall **FS390A** 96" Tall

**FS396A** 

30" Tall FS630A

36" Tall **FS636A** 42" Tall

**FS642A** 


96" Tall

**FS696A** 

#### **BAR RISER KITS**

#### **FEATURES**

- 3/4" All-Weatherboard® composite material cabinet construction
- 4" deep by 36" high
- Requires BTP for field installation to match the cabinet doors



**BRK27** BRK30 BRK33 BRK36 **BRK39** BRK40 **BRK41 BRK42** BRK43 BRK44 **BRK45 BRK46 BRK47 BRK48** 

**BRK49** 

**BRK12** 

**BRK15** 

**BRK18** 

**BRK21** 

BRK24

ROT12-FG

ROT15-FG

ROT18-FG

ROT21-FG

ROT24-FG

ROT27-FG

ROT30-FG


#### **6" WIDE FILLER/TOE KICK**


#### **FEATURES**


Available in all finishes

#### **PLEASE NOTE**

**6"X96" FILLER CAN ALSO BE MODIFIED ON SITE TO BE USED AS A MATCHING TOE** KICK ONCE CABINETS ARE INSTALLED ON LEGS








## **PARTS & ACCESSORIES**

#### **CORBEL/COUNTERTOP SUPPORT**

#### **FEATURES**

CBL8

- Available in all finishes
- Requires stainless steel installation screws, sold separately



# 1 1/4" 316 STAINLESS STEEL CABINET JOINING SCREWS (30 PACK)

#### **FEATURES**

- Square Head Bit included
- Used for joining cabinets together and for installing Matching Panels and Corbels



- Required for installation
- Screws sold separately
- Please see page 47 for installation guide.

30 Pack WSSS1.25-SCREW KIT

CABINET TYPE	QTY.	LOCATION
Bases	2	Front Edge
Island Base	4	Front & Back Edges
Bar Base	4	Front & Back Edges
Walls up to 30" H	2	Front Edge
Walls 36 & 42" H	3	Front Edge
VVali3 30 & 42 11		1 Tolk Lage

REPLACEMENT GRILL APRON FRONT


#### \*MATCHES DOOR COLOR

Description	Item Number
Replacement Grill Drawer Front 14.9X11.9	RPGDF1512
Replacement Grill Drawer Front 17.9X11.9	RPGDF1812
Replacement Grill Drawer Front 20.9X11.9	RPGDF2112
Replacement Grill Drawer Front 23.9X11.9	RPGDF2412
Replacement Grill Drawer Front 29.9X11.9	RPGDF3012
Replacement Grill Drawer Front 35.9X11.9	RPGDF3612
Replacement Grill Drawer Front 41.9X11.9	RPGDF4212
Replacement Grill Drawer Front 47.9X11.9	RPGDF4812
Replacement Grill Drawer Front 47.9X17.9	RPGDF4818
Replacement Grill Drawer Front 59.9X11.9	RPGDF6012

#### STAINLESS STEEL LEGS

#### **FEATURES**

- Includes 4 316 stainless steel legs, 4 mounting plates, and 316 stainless steel screws
- Height adjustment from 4" to 5 7/16"
- Each leg rated for 2,000lb static load

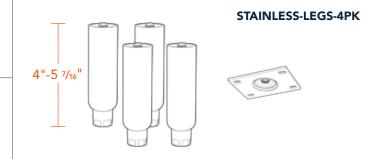

#### STAINLESS STEEL LEG CLIP

#### **FEATURES**


- Durable U-Shaped clip for attaching toe kick to stainless steel legs
- Includes Clip and screw
- Available in Single pack or pack of four
- See install guide on page 43 for installation instructions

PLS-TK-CLIP-1PK PLS-TK-CLIP-4PK

#### **SURE LEVEL LEGS (4 PACK)**

#### **FEATURES**

- Includes 4 adjustable legs
- 4 mounting plates, 4 toe kick clips and 316 stainless steel screws
- Height adjustment: Short stem: 3 ¾"- 5 ¼"



# **OUTDOOR STOOLS**

### **BAR HEIGHT STOOL**

### Stool-BH

### **FEATURES**

- Full HDPE construction
- Designed to support 350 lbs.
- Marine-grade stainless steel hardware
- Ships assembled



### **Available Colors**





Pitch Black






Teak Dark Ash

### **COUNTER HEIGHT STOOL**

### Stool-CH

### **FEATURES**

- Full HDPE construction
- Designed to support 350 lbs.
- Marine-grade stainless steel hardware
- Ships assembled



### **Available Colors**










Pitch Black Teak Dark Ash




# DRAWER FRONT & DRAWER BOX DIMENSIONS

BASE CABINETS WITH DRAWERS									
Cabinet Code	Shalllow Drawer 6" High Fronts	Medium 8" High Fronts	Deep Drawer 12" High Fronts						
В	1	0	0						
B3D	1	0	2						
B4D	1	3	0						

**B** Base Door & Drawer



**B4D** 4-Drawer Base



Æ	
6"	

BASE CABINETS WITH DRAWERS												
Cabinet	Shalllow Drawer		Medium		Deep Drawer							
Cabinet	Height	Depth	Width	Height	Depth	Width	Height	Depth	Width			
B12, B12-1T, B12-2T, B1227, B1227-1T, B1227-2T, B3D12, B3D1227, B4D12, B4D1227	3-3/4"	20-1/4"	8"	5-1/4"	20-1/4"	8"	7-1/4"	20-1/4"	8"			
B15, B15-1T, B15-2T, B1527, B1527-1T, B1527-2T, B3D15, B3D1527, B4D15, B4D1527	3-3/4"	20-1/4"	11"	5-1/4"	20-1/4"	11"	7-1/4"	20-1/4"	11"			
B18, B18-1T, B18-2T, B1827, B1827-1T, B1827-2T, B3D18, B3D1827, B4D18, B4D1827	3-3/4"	20-1/4"	14"	5-1/4"	20-1/4"	14"	7-1/4"	20-1/4"	14"			
B21, B21-1T, B21-2T, B2127, B2127-1T, B2127-2T, B3D21, B3D2127, B4D21, B4D2127	3-3/4"	20-1/4"	17"	5-1/4"	20-1/4"	17"	7-1/4"	20-1/4"	17"			
B24, B24-1T, B24-2T, B2427, B2427-1T, B2427-2T, B3D24, B3D2427, B4D24, B4D2427	3-3/4"	20-1/4"	20"	5-1/4"	20-1/4"	20"	7-1/4"	20-1/4"	20"			
B27, B27-1T, B27-2T, B2727, B2727-1T, B2727-2T, B3D27, B3D2727, B4D27, B4D2727	3-3/4"	20-1/4"	23"	5-1/4"	20-1/4"	23"	7-1/4"	20-1/4"	23"			
B30, B30-1T, B30-2T, B3027, B3027-1T, B3027-2T, B3D30, B3D3027, B4D30, B4D3027	3-3/4"	20-1/4"	26"	5-1/4"	20-1/4"	26"	7-1/4"	20-1/4"	26"			
B33, B33-1T, B33-2T, B3327, B3327-1T, B3327-2T, B3D33, B3D3327, B4D33, B4D3327	3-3/4"	20-1/4"	29"	5-1/4"	20-1/4"	29"	7-1/4"	20-1/4"	29"			
B36, B36-1T, B36-2T, B3627, B3627-1T, B3627-2T, B3D36, B3D3627, B4D36, B4D3627	3-3/4"	20-1/4"	30"	5-1/4"	20-1/4"	30"	7-1/4"	20-1/4"	30"			

# **DECORATIVE HARDWARE**

### **CONTOURED POLISHED C-PULL**

### **FEATURES**

- 316 Stainless steel handle with screws
- 4 1/4" overall length
- 3 15/16" center to center

DH-00171



### **EURO BAR PULL**

### **FEATURES**

- 316 Stainless steel handle with screws
- 7 9/32" overall length

• 5 1/32" center to center



DH-21021



### **WIDE BRUSHED C-PULL**

### **FEATURES**

- 316 Stainless steel handle with screws
- 4 1/16" overall length
- 3 ¾" center to center

DH-45170



### **PROFESSIONAL BAR PULL**

### **FEATURES**

- 316 Stainless steel handle with screws
- 8 ¾" overall length
- 7 ½" center to center

Please make sure to check the width of your drawer front. The handle fits drawer fronts of 18" wide or more.

\*\*Fits all Miami drawer fronts\*\*






DH-92170

# LEVELING LEG INSTALLATION - PLASTIC LEGS


### LEVELING LEG ASSEMBLY


Simple assembly is required for each Leveling Leg


For easier handling and to avoid damage remove doors and drawers from the cabinet. Then, using two or more people, place the cabinet upside down on a protected surface.




1. Place the 2 front leg brackets 3-1/2" from the front edge with the support plate overlapping the end panel – 1/4" from the outer edge.



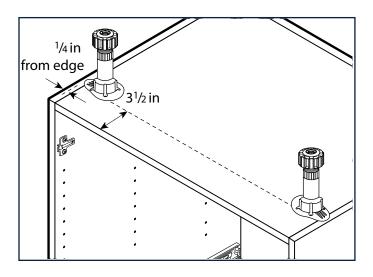




2. Place the 2 back leg brackets 1" from the back edge with the support plate overlapping the end panel – 1/4" from the outer edge.




4. Adjust the leveling legs up or down to bring the cabinet to a level plumb position. Use of the longer stems may be needed in this application.

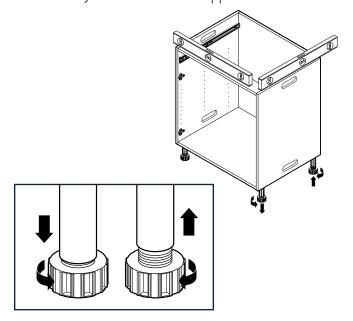



# TOE KICK APPLICATION - PLASTIC LEGS


1. Lay the trimmed Toe Kick panel in front of the cabinet against the Leveling Legs. Mark the location of each Leg on the back of the panel. Clips are not needed on all Leg locations, but enough for a secure hold

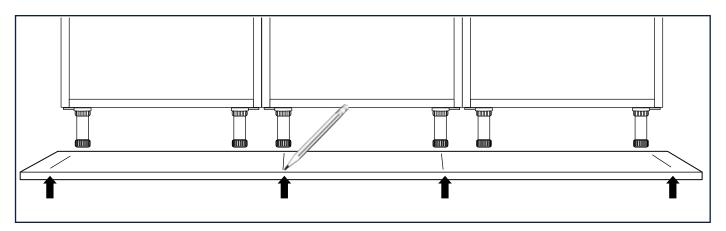

- 2. Center the Clip Plates half way up the height of the panel, screw into place. Then slide a Clip into each Plate.
- 3. Align the Panel and push the clips onto the Legs

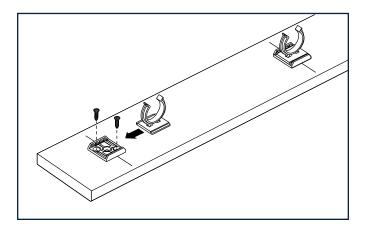

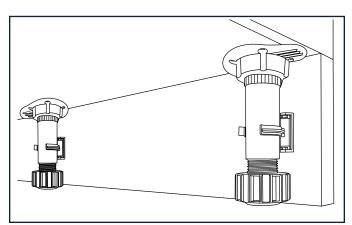

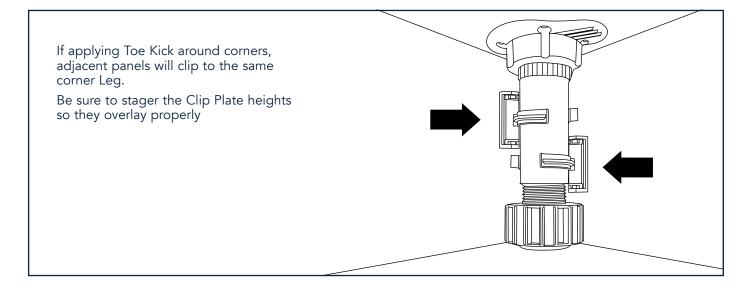



# LEVELING LEG INSTALLATION - STAINLESS LEGS


# STAINLESS STEEL LEVELING LEG ASSEMBLY

Simple assembly is required for each Leveling Leg


For easier handling and to avoid damage remove doors and drawers from the cabinet. Then, using two or more people, place the cabinet upside down on a protected surface.



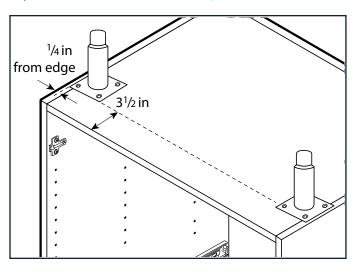





3. Use a Phillips bit to attach the legs with the stainless steel screws supplied. DO NOT OVERTIGHTEN!

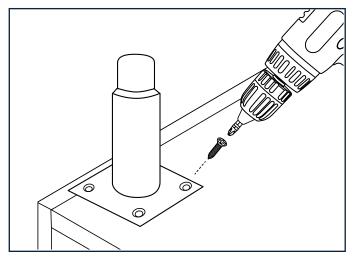

2. Place the 2 back leg brackets 1" from the back edge with the support plate overlapping the end panel – 1/4" from the outer edge.

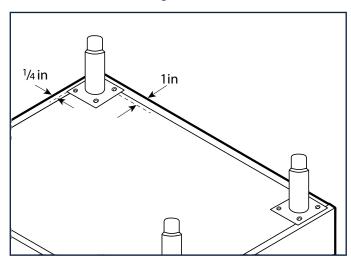


4. Adjust the leveling legs up or down to bring the cabinet to a level plumb position.

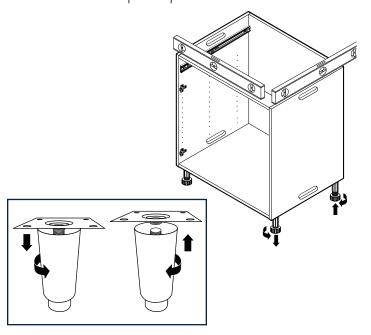



# TOE KICK APPLICATION


1. Lay the trimmed Toe Kick panel in front of the cabinet against the Leveling Legs. Mark the location of each Leg on the back of the panel. Clips are not needed on all Leg locations, but enough for a secure hold

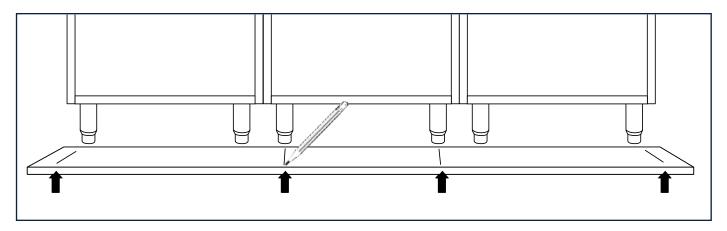

- 2. Center the clips half way up the height of the toe kick panel, screw into place. Then screw the clip directly onto the toe kick panel.
- 3. Align the Panel and push the clips onto the Legs

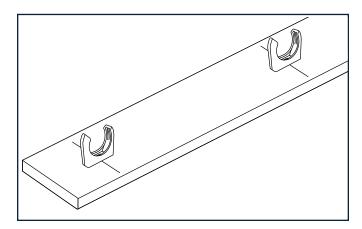

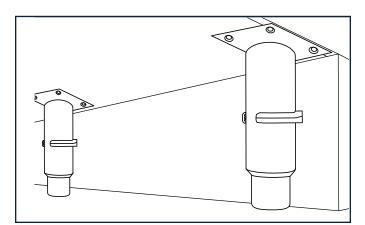

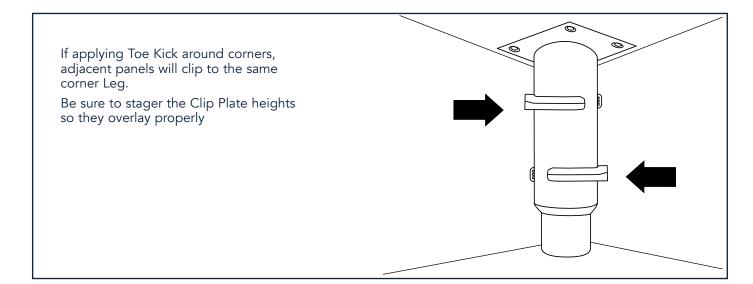

### REQUIRED TOOLS

- Level
- Plastic Shims (for leveling if necessary)
- Drill
- Tapcon® 3/16" x 2-3/4" Stainless Steel Screws
- 1/4" Stainless Steel Washers
- Tapcon® 3/16" Drill Bit (pilot holes in concrete typically is provided with screws)
- 3/16" Wood Drill Bit (pilot holes in cabinet backs or installation rails)
- 1/8" Wood Drill Bit (pilot holes in cabinet sides to join them together)
- Phillips Head Screwdriver
- Clamps (with rubber pads)
- Saw (circular or table) to trim matching end panels and toe kick fillers
- Carpenter's Square
- Tape Measure
- Extension Cord
- Step Ladder (at least 6' if installing wall cabinets)

### **BEFORE YOU BEGIN:**

Check your new cabinetry against your design plan to ensure that you have all required cabinets, moldings, fillers, and accessories to complete the installation.

### **SAFETY FIRST:**

To avoid injury, explosion, or shock, make sure that all water supplies, gas supplies, and pertinent circuit breakers are shut off. Double check electrical using circuit tester to confirm power is off. If you are uncertain that utilities have been properly shut off, consult your utility company or service professional.

### **CAUTION:**

It is essential that you use the recommended screws for your cabinetry installation. Under no circumstances should you use nails or drywall screws as they do not have the strength or holding power to ensure that cabinets stay on the wall. Failure to use specified screws will render warranty null and void.


Installation detailed in this manual is for concrete block construction only. Attachment to any other wall types will require locating the wood or steel studs behind the wall. Consult with your local home center, hardware store or installation specialist for recommended fasteners.

### LEVELING THE CABINETS

Leveling the cabinets is the most important part of installation, to ensure doors align properly and countertop sets evenly. They are to be level and square. Make sure your leveling legs are installed and adjusted. Review separate leveling leg instructions.

Be sure to level your cabinets in all three directions:

- 1. Front to Back
- 2. Vertically
- 3. Horizontally

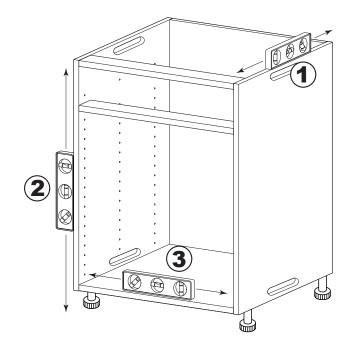



### ANCHORING TO CONCRETE BLOCK WALLS

Prior to installation you will find it easier to handle the cabinet with the doors and drawers removed.

Hinges can be removed from the hinge plate by simply pressing in the release button on the end of the hinge, and pulling away from the cabinet. They are re-attached by hooking the hinge to the plate and snapping the pressure release into place.


Pull the drawer out until it stops. Each drawer runner has a small plastic release tab. One tab will point up and the other will point down. Holding the drawer box on each side, push the tabs in the opposite direction from which they're pointing and carefully pull the drawer box out. Carefully push the runners back into the cabinet.

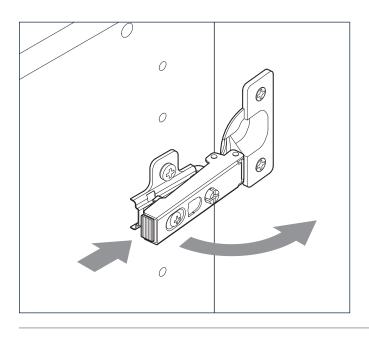

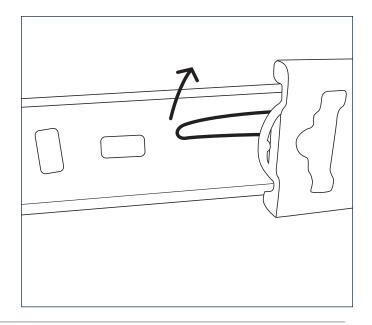


### **ANCHORING TO CONCRETE BLOCK WALLS**

- 1. Each Wall Cabinet requires 4 wall anchors (2 top, 2 bottom).
- 2. Screws should be placed in each corner approximately 2" from the end panels.
- 3. Pre-drill the pilot holes before you place the cabinet against the wall with a standard 3/16" drill bit.
- 4. Then put the cabinet in place. In each corner use the 3/16" Tapcon® bit through the pilot holes to




- create starter holes into the concrete block, for the Tapcon® anchors.
- 5. Remove the cabinet to complete drilling the pilot holes into the concrete block. When complete, place the cabinet against the wall.
- 6. Once you confirm the cabinet is level and square, use Tapcon® 410 Stainless Steel 3/16" x 2-3/4" fasteners, with a ¼ stainless steel washer to secure the cabinet to the wall.

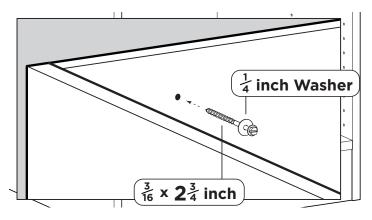

### **FASTENING CABINETS TOGETHER**

As you install your Base and Wall cabinets, you should fasten the cabinets together along the front edge. This will help reduce gaps between cabinets and maintain alignment.

- 1. To secure cabinets together, a 1-¼" stainless steel screw is used. (Model #WSSS1.25-Screw Kit) Pre-drill a 1/8" pilot hole in one end panel. Try to locate the joining screws where they will not be visible, above the drawer runner or behind the hinge plate.
- 2. Use clamps to hold cabinet panel in alignment. Insert the screw through the pilot hole into the second cabinet end panel be careful not to countersink the head.

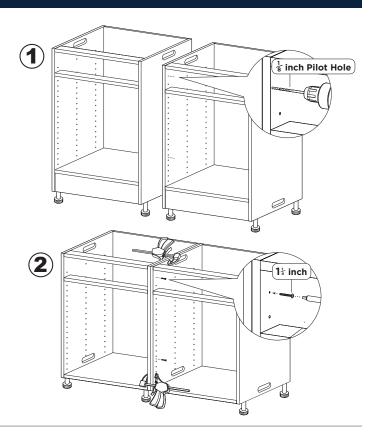

### ADJUSTING DOOR ALIGNMENT

### **DOOR ALIGNMENT**


**WeatherStrong®** Cabinets feature a 6-way adjustable hinge that will allow you to adjust and align all the doors after installation


- 1. The center screw will adjust the door from side to side.
- 2. The top and bottom screws in the hinge plate will allow adjustment up and down.
- 3. The back screw will adjust the door in and out.


Please Note: These are soft-close hinges and will close slower at first.

### TO REINSTALL THE DRAWERS

- 1. Extend both drawer runners all the way out of the cabinet box.
- 2. Carefully reengage the metal drawer box profiles on both sides.
- 3. Once both profiles are engaged about 1" carefully push the drawer all the way into the cabinet.







### **BAR RISER KIT**

If your design includes a Bar Riser Kit (BRK), the information below will help you to install it.

We recommend installing the cabinet legs after you have attached the bar riser to the base cabinet.

- 1. Lay out the cabinets that make up your kitchen and locate where the bar riser kits are going to be placed.
  - Note: Some BRK's may overlap two cabinets, so follow your floorplan carefully.
- 2. Attach the BRK to the base cabinet(s) by lining up the bottom of the bar riser with the bottom of the cabinet.
- 3. Attach the bar riser using 1-1/4" stainless steel screws (WSSS1.25-ScrewKit) by screwing from the inside of the cabinet through the rear hanging rails.
- 4. Once the BRK is attached, you can install the adjustable legs and level the cabinet/riser.


### **BAR RISER KITS**

- 3/4" All-Weatherboard® composite material cabinet construction
- 4" deep by 36" high
- Requires BTP for field installation to match the cabinet doors

Bar Risers are 4" deep by 36" high and are available in 3" width increments from 12" to 48". When securely attached to the back of a 34-1/2" high base cabinet, the top of the riser will be approximately

40-½" from the floor. These field installed kits feature a full-height ¾" thick enclosed **All-Weatherboard®** composite material back panel and can only be paired with the Island Back base cabinets. These kits will turn almost any base cabinet into a two-level bar.

Please Note: Exposed cabinet sides and backs MUST be covered by a matching end/island panel.

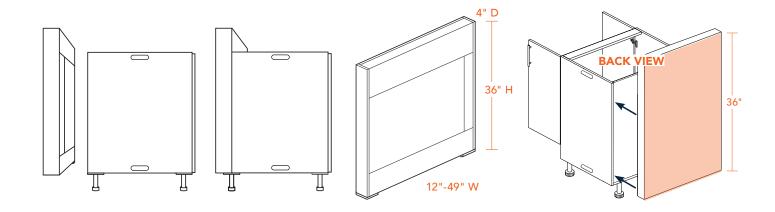

### **GRILL BASES AND SIDE BURNER CABINETS**

Grill Bases and Side Burner Cabinets have a few extra steps that make up the proper installation.

First and foremost, if you are installing a drop-in grill or side burner in your cabinets, you **MUST** first install an insulated jacket before inserting the heat admitting appliance. This protects your cabinets from the extreme heat and protects your limited warranty.

Please Note: You must purchase the insulated jacket from the manufacturer of the gas/heat appliance. Please follow the manufacturer's instructions on how to properly support your appliance and insulated jacket inside the cabinet.

### **CABINET MODIFICATION:**

- Your grill base or side burner cabinet comes with two panels in the upper, apron part of the cabinet.
- Mark the required cut-out necessary to install the insulated jacket and the gas appliance. Refer to the specification and installation guides supplied by the appliance manufacturer, or use a template if provided. Remember to account for the countertop thickness.
- 3. Carefully cut out the required space on the cabinet apron and decorative overlay panel.
- 4. Place the insulated jacket into the cutout to ensure a proper fit.
- 5. Fabricate a support brace, inside the cabinet, based on the appliance manufacturer's recommendation.
- We recommend hiring a licensed professional to install the gas appliances and the insulated jacket.


### **GRILL DOUBLE DOOR BASE**


- The face plate is modified in field to accept the respective insulated jacket used with the gas grill
- 3/4" All-Weatherboard® composite material cabinet construction
- Fully integrated back panel
- Includes Sure Level polymer legs, shipped loose for field installation and leveling. Upgraded stainless steel Sure Level legs are available
- Available in all door styles and finishes
- Stainless steel handles sold separately

Please Note: All built-in grill heads require an insulated jacket. Please consult your grill manufacturer for the appropriate model.

### PROPER VENTING:

All Base Cabinets have precut vent slots in the cabinet sides. These provide airflow through the cabinetry and enable any excess gas to vent out the end of the run. Matching Base End Panels are available with decorative vent grills (see page 33)."





### MATCHING ENDS AND ISLAND BACK PANELS

Matching End Panels and Island Back Panels are used to cover any exposed cabinet sides or backs. These panels are manufactured from the same HDPE material as the cabinet doors and drawer fronts.

Matching End Panels are oversized and will not match the exact measurements of your cabinets. This allows them to be trimmed to follow the pitch of the floor of your outdoor space, which is often sloped. Trimming HDPE will not leave a raw edge as the material color is through and through.

Matching Panels should be trimmed to fit after the cabinets are permanently set and leveled.

### PANEL INSTALLATION:

- 1. Refer to your floorplan or cabinet layout to determine which panels go in which location.
- 2. Measure each panel location from front to back and top to bottom. Use these measurements to mark your panel.
- 3. Once the panel is marked, use a table saw or circular saw to trim the panel to size.
- 4. Use C-clamps or Quick-Grips to hold the panel in place during installation.

- a. Screws (WSSS1.25-Screwkit) can be used to secure the panels to the cabinets.
- b. If using Screws make sure to drill pilot holes into the cabinet before placing the permanent screw.
- 5. Attach the panel by screwing the panel from inside the cabinet box.

Please Note: Panels that will cover the side of a cabinet with a Bar Riser Kit attached will need to have the profile of the side of the cabinet combination cut out.

Panel as shipped

Panel after cutting on job site without heat component

Panel after cutting on job site with heat component


### **INSTALLING HARDWARE:**


Hardware is the final step of your cabinet installation. This is done after the drawers are back in place and the doors have been replaced and adjusted to be square.

Placement of your hardware is per your choice and a template can be purchased from your local hardware store.

### **INSTALL:**

- 1. Mark your doors/drawer fronts with a pencil or small marker where the screw holes will go.
  - Make sure to carefully measure where these holes will be drilled to ensure proper placement.
- 2. Drill the screw holes using the 3/16" drill bit.
- 3. Attach the hardware using the screws provided in the hardware bag, from the inside of the door/drawer out into the piece of hardware.







## **CARE AND USE GUIDE**

### **AFTER INSTALLATION CARE**

After your cabinets have been installed, wipe down all exteriors with a damp cloth to remove dust.

Clean Up: Wash **WeatherStrong®** with water and a soft cloth or sponge. A mild dishwashing liquid can be used if needed. For tougher to clean spots, wash with Simply Green All-Purpose Household Cleaner. A soft bristle brush may be used if needed.

### **EVERYDAY CARE**

Salt Water Environments: Oceanfront environments with salt air and sea spray will require regular maintenance and cleaning to prevent rust from forming on the handles, hinges and drawer runners. Clean stainless steel surfaces several times a month to keep the chemical reaction, from the salt, from gaining a foothold on the hardware. With regular cleaning, your cabinets will look like new for many years. To achieve maximum corrosion and stain resistance, the surface of the stainless steel must be kept clean.

**NEVER** use abrasive cleaners, scouring pads or powdered cleansers.

### **HARDWARE CARE**

Use mild soap and warm water to clean door, drawer knobs and pulls. Thoroughly dry hardware surfaces after cleaning. **DO NOT** use silver or brass polish.

### **GRILL & SIDE BURNER CABINET MODIFICATIONS**

Grill and side burner cabinets are manufactured with two full upper face plates that will need to be field modified to accept the respective insulated jacket used with the gas grill or side burner.

The second matching panel will be shipped loose for ease of modification and installation. It can be attached with stainless steel screws or a suitable construction grade adhesive. Under no circumstance should a grill or side burner be installed without the appropriate insulated jacket specified by the manufacturer of the appliance.

### **HEAT APPLIANCES**

Free-standing grills with adequate space from direct heat are recommended or grills with insulated jacket specified by the grill manufacturer can be installed in **WeatherStrong®** cabinets.

Insulated jackets are **required** for heat admitting appliances being installed in **WeatherStrong®**.

### **LIGHT EXPOSURE**

Cabinet sides and backs that will be exposed to direct sunlight and other weather elements MUST be covered by a matching end panel in coordinating High-Density Polyethylene (HDPE). Failure to install these protective panels will void the cabinet warranty.

### **DRAWER REMOVAL**



**STEP 1**Fully open drawer and remove contents.



To re-install, align drawer slides and gently push drawer closed. Locking tabs do not need to be pressed.

STEP 4



With drawer fully extended, locate slide release tab on left side and push up to release.



Open and close drawer several times to ensure proper alignment.




STEP 3
Locate release
tab on right side
and push down to
release. Pull drawer
forward to remove.


# **CARE AND USE GUIDE**

### **ROLL-OUT TRAY RELOCATION/INSTALLATION**

### STEP 1


Install two Spacers on each End Panel just above the lower hinge, as shown, using two Euro Screws per Spacer. If applicable repeat steps to install an additional upper Rollout Tray at the designated holes shown above.





### STEP 2


Remove Drawer Runners from packaging and extend the runners. While pressing down on the white tab pull Smaller Runner Member (A) apart from Larger Runner Member (B).







### STEP 3

Attach the Larger Runner Members (B) to the Spacers using two Euro Screws per runner. To access the attachment holes, you will need to extend the runner mechanism, as shown.









### STEP 4


Carefully slide the Rollout Tray into the Larger Runner Members (B) by inserting the Smaller Members (A) into the plastic guides at the front of the Larger Members. You should hear a 'click' when fully inserted.





# **CARE AND USE GUIDE**

### DOOR POSITION ADJUSTMENT



### **HEIGHT**

Loosen two screws and adjust door to desired position. Re-tighten all screws.




### SIDE TO SIDE

Using a Phillips screwdriver, rotate front screw to move the door to the desired position.




### **DEPTH**

Using a Phillips screwdriver, rotate back screw to move the door to the desired position.




### **HEIGHT**

For vertical door adjustment loosen center screw on each hinge. Set door at desired height. Retighten each screw.



### **SIDE TO SIDE**

Rotate front screw for horizontal door adjustment



### **DEPTH**

Rotate back screw for front to back door adjustment



### **SHELFT RESTS**

Adjustable shelve sit on sturdy clear polymer shelf rests.



### **DRAWER FRONT ADJUSTMENT**

If additional adjustment is required, loosen screws and twist drawer front for proper alignment. Tighten screws securely.





# Limited Warranty

Ideal Cabinetry® (warrantor) warrants to the original consumer purchaser, that the WeatherStrong® branded outdoor cabinets will be free from defects in material and workmanship under normal residential use. The warranty for the Designer Series is for your lifetime as long as you own the cabinetry and is not transferable. The warranty for the Standard Series is for a period of five years as long as you own the cabinetry and is not transferable. Both warranties are expressly limited to the cabinet carcass, doors, drawers, and shelves. The warranty on stainless steel hardware, including screws, handles, hinges, drawer runners and adjustable legs is five years. Proof of purchase is required. Items not listed in this warranty are not covered by this warranty. No other warranty express or implied, is applicable to this product. Separate components not produced by Ideal Cabinetry such as countertops, sinks, grills, and appliances are not covered by this warranty. Manufacturers installation guidelines must be followed including ventilation requirements.

This warranty does not cover damage resulting from normal wear, natural aging, accident, misuse, excessive heat, or lack of reasonable and necessary maintenance and service; nor does it warranty the improper installation or unauthorized repair, alteration, modification, or defects in the product when the product is installed. For Designer Series cabinetry, excessive heat is a surface temp >265°, for Standard Series cabinets, excessive heat is a surface temp >140°. This warranty is limited to the repair or replacement of the defective part at the sole discretion of warrantor.

Although Ideal Cabinetry uses the best available materials and does extensive testing for finish endurance, some fading may occur and is considered normal. For coastal locations, some deterioration is considered normal wear in this environment.

It is our option to provide repair parts or replace with functionally equivalent product. Return of product may be required for replacements. Such repair parts or replacement shall be at warrantor's expense, but customer shall bear all other expenses, including, but not limited to, cost of removal, transportation, re-installation, communication, and any special service required by customer such as, overtime labor, etc. Ideal Cabinetry shall not be liable for the loss of use of the product, inconvenience, loss or any other damages, direct or consequential, arising out of the use of or inability to use the product. Due to the nature of the product, replacement product may vary from original purchased product.

In the event of a **WeatherStrong®** brand warranted product performance issue, submit request including proof of purchase documentation, specific description of warranty issue (include photos) in writing to:

Warranty Department 210 Century Boulevard Bartow, FL 33830

Ideal Cabinetry reserves the right to alter design, specifications, and material without obligation to make changes to product previously manufactured.

EXCEPT TO THE EXTENT PROVIDED BY APPLICABLE LAW, ALL IMPLIED WARRANTIES, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, ARE LIMITED IN DURATION TO THE SHORTER OF THE PERIOD PROVIDED BY LAW OR THE PERIOD OF THIS WARRANTY, AND UNDER NO CIRCUMSTANCE SHALL IDEAL CABINETRY BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES SUSTAINED IN CONNECTION WITH THE PRODUCT. THE EXPRESS WARRANTY ABOVE CONSTITUTES THE ENTIRE WARRANTY AND IS IN LIEU OF ALL OTHERS EXPRESSED OR IMPLIED.

Some states do not allow the exclusion or limitation of incidental or consequential damages, or limitation on how long an implied warranty lasts, therefore, the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

### INDEMNITY

Ideal Cabinetry shall not be liable for either its failure to perform or its delays in performance hereunder arising out of or resulting from causes beyond its control, including but not limited to, acts of God, acts of Representation, acts of Government, conflicts, wars, fires, floods, epidemics, quarantine, strike, freight embargoes, weather, or default by suppliers due to any such causes.

# NOTES



# NOTES







weatherstrong.com 888-745-0004





